




A920 QUICK START GUIDE

INITIAL DEVICE SETUP (IMPORTANT)


- Turn your device on and connect it to your Wi-Fi network. Wait for your config files to install, the device will reboot during this process.
- Once rebooted, set your device Supervisor password, the default username and password is 1234.
- Navigate to the "Admin Menu" and tap the "Cycle Keys" function to establish a connection to the acquirer.



Device layout (front)

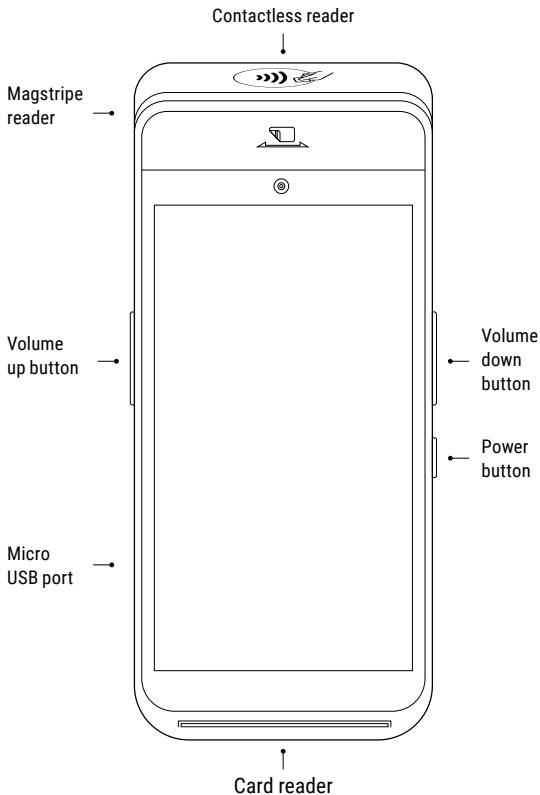

Device layout (back)

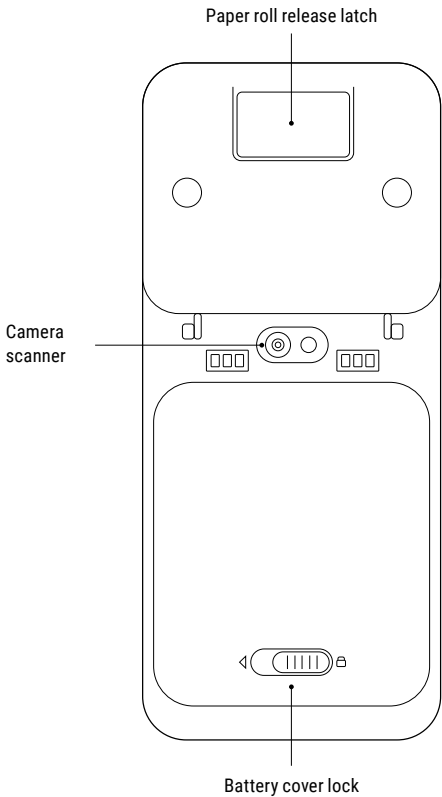

Quick start guide

What's in the box?

- 1 x PAX A920 terminal
- 1 x USB cable
- 1 x UK AC mains cable
- 1 x PAX A920 quick start guide
- 1 x Thermal paper roll

Initial device setup (IMPORTANT)

- Turn your device on and connect it to your Wi-Fi network. Wait for your config files to install, the device will reboot during this process.
- Once rebooted, set your device Supervisor password, the default username and password is 1234.
- Navigate to the "Admin Menu" and tap the "Cycle Keys" function to establish a connection to the acquirer.

Changing the paper roll

- Open the paper cover latch, remove used paper roll.
- Insert new paper roll with the paper poking out the top of the device, adhering to the orientation shown in the paper roll holder.
- Ensure the lid is fully closed so that the paper feed roller fully engages the paper. Tear off any excess paper.

Changing the main battery

- Locate the rear battery cover and slide the open/close lock to the right.
- Remove the cover and lift the battery by swinging it upwards from the bottom and remove.

- To install a battery, first remove the protective cover over the battery connectors.
- Insert the battery with the gold connectors towards the top right side whilst carefully pushing the battery lower edge into place.
- Refit and lock the battery cover.

Power on

- Press and hold the power button for three seconds until the screen powers on.

Power off

- Press and hold the power button for three seconds until the power menu is shown.
- Tap "Power off", and then "Power off" again. A "shutting down" message will show when the terminal is turning off.

Sleep mode

- To put the device in or wake the device from sleep mode, click the power button.

Connecting to Wi-Fi

- Click the three lines in the top right hand corner of the screen and select Wi-Fi Settings.
- The device will automatically search and bring up available Wi-Fi networks.
- Complete the connection process and click the back arrow on the bottom left of the screen when complete.